


RCCN 日成BGX型金属锁紧型软管防水接头 Metal waterproof cable gland

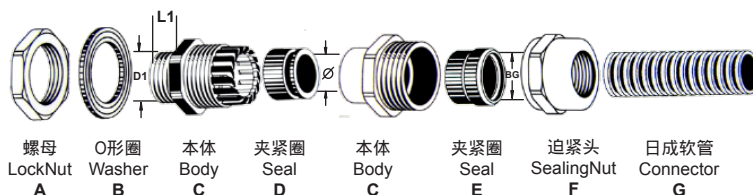

螺牙规格:公制螺牙(Metric).

产品材质:A.C.F部位均采用锌合金镀镍制成.D采用耐油丁腈橡胶(NBR)制成,B.E采用硅橡胶制成.

产品认证:欧洲CE,欧洲环保ROHS.

防护等级:在规定的卡口范围内,并使用O形密封圈旋紧迫紧头,达到IP68.

产品特性:配套锁紧式电缆接头,防电线松动,内锁扣和本体特殊设计,装卸只需拨插无需工具,大大缩短了安装时间,夹紧电缆范围大,抗拉力特强,可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂.

说明:本系列应环境要求新开发设计,代替原日成老款BGL系列.

本品适合对环境要求较高使用:室外水下灯具,地铁机车,风能太阳能,核电,轮船,电机,高端设备等项目安装.配合日成尼龙管使用,户外用时配合日成SCM含胶管保护更理想.

Thread:Metric

Material:A.C.F are made of zinc metal plated with nickel.D made of NBR,B,E are made of rubber

Certificates:CE,ROHS.

Protect rate:in bayonet scope,used with O ring,screw down lock nut,can be up to IP68

Product characteristics:Special design of part D and E,used with part F, can save your time,large spread of cable sealing,good re-tensile,waterproof,ashproof,re-salty, withstand impregnant like acid,alkali,alcohol,oil,grease

单位/Unit:mm

| 型号 Item No. | 螺牙规格 Thread | 适用电缆 Cable Range Ø | 对应日成软管型号 Suit to RCCN conduit item no BG | 对应日成软管型号 Suit to RCCN conduit item no BG | 螺纹外径 Thread O.D. D1 | 机板口径 Panel Mounting Hole | 螺纹长度 Thread Length L1 | 包装 Std.Pkg. pcs |
|---------------------------------|----------------|-----------------------------|---|---|------------------------------|-----------------------------------|--------------------------------|-----------------------|
| 公制螺牙/Metric thread BGX-M | | | | | | | | |
| BGX-M12(BG07) | M12×1.5 | 3-6 | BG-07 | 10.0 | 12 | 12-12.3 | 6 | 100PCS |
| BGX-M12(BG10) | M12×1.5 | 3-6 | BG-10 | 13.0 | 12 | 12-12.3 | 6 | |
| BGX-M16(BG07) | M16×1.5 | 4-8 | BG-07 | 10.0 | 16 | 16-16.3 | 7 | |
| BGX-M16(BG10) | M16×1.5 | 4-8 | BG-10 | 13.0 | 16 | 16-16.3 | 7 | |
| BGX-M16(BG12) | M16×1.5 | 4-8 | BG-12 | 15.8 | 16 | 16-16.3 | 7 | |
| BGX-M18(BG12) | M18×1.5 | 6-10 | BG-12 | 15.8 | 18 | 18-18.3 | 8 | |
| BGX-M18(BG15) | M18×1.5 | 6-10 | BG-15 | 18.5 | 18 | 18-18.3 | 8 | 50PCS |
| BGX-M20(BG12) | M20×1.5 | 8-12 | BG-12 | 15.8 | 20 | 20-20.3 | 8 | |
| BGX-M20(BG15) | M20×1.5 | 8-12 | BG-15 | 18.5 | 20 | 20-20.3 | 8 | |
| BGX-M20(BG17) | M20×1.5 | 8-12 | BG-17 | 21.2 | 20 | 20-20.3 | 8 | |
| BGX-M22(BG17) | M22×1.5 | 10-14 | BG-17 | 21.2 | 22 | 22-22.3 | 9 | |
| BGX-M24(BG17) | M24×1.5 | 10-14 | BG-17 | 21.2 | 24 | 24-24.3 | 10 | |
| BGX-M25(BG17) | M25×1.5 | 10-14 | BG-17 | 21.2 | 25 | 25-25.4 | 10 | 10PCS |
| BGX-M25(BG20) | M25×1.5 | 10-14 | BG-20 | 25.0 | 25 | 25-25.4 | 10 | |
| BGX-M25(BG23) | M25×1.5 | 10-14 | BG-23 | 28.5 | 25 | 25-25.4 | 10 | |
| BGX-M27(BG23) | M27×1.5 | 13-18 | BG-23 | 28.5 | 27 | 27-27.4 | 11 | |
| BGX-M30(BG23) | M30×1.5 | 13-18 | BG-23 | 28.5 | 30 | 30-30.4 | 11 | |
| BGX-M30(BG29) | M30×1.5 | 13-18 | BG-29 | 34.5 | 30 | 30-30.4 | 11 | |
| BGX-M32(BG23) | M32×1.5 | 15-22 | BG-23 | 28.5 | 32 | 32-32.4 | 11 | 10PCS |
| BGX-M32(BG29) | M32×1.5 | 15-22 | BG-29 | 34.5 | 32 | 32-32.4 | 11 | |
| BGX-M33(BG23) | M33×1.5 | 15-22 | BG-23 | 28.5 | 33 | 33-33.4 | 11 | |
| BGX-M33(BG29) | M33×1.5 | 15-22 | BG-29 | 34.5 | 33 | 33-33.4 | 11 | |
| BGX-M36(BG29) | M36×1.5 | 18-25 | BG-29 | 34.5 | 36 | 36-36.4 | 11 | |
| BGX-M40(BG29) | M40×1.5 | 18-25 | BG-29 | 34.5 | 40 | 40-40.4 | 12 | |
| BGX-M40(BG36) | M40×1.5 | 18-25 | BG-36 | 42.5 | 40 | 40-40.4 | 12 | 10PCS |
| BGX-M50(BG36) | M50×1.5 | 26-32 | BG-36 | 42.5 | 50 | 50-50.4 | 13 | |
| BGX-M50(BG48) | M50×1.5 | 26-32 | BG-48 | 54.5 | 50 | 50-50.4 | 13 | |
| BGX-M63(BG48) | M63×1.5 | 37-44 | BG-48 | 54.5 | 63 | 63-63.4 | 14 | |

可定制铜制 型号例:BGX1-M20(BG-17)

Copper material can be produced, such as:BGX1-M20(BG-17)